


| COLOR CODE |    |
|------------|----|
| Red        | R  |
| Yellow     | Y  |
| Green      | G  |
| Blue       | BU |
| Brown      | BR |
| White      | W  |
| Black      | BL |

| WIRE SIZE | GAUGE |
|-----------|-------|
| Large     | 10    |
| Med.      | 12    |
| Small     | 16    |


EXAMPLE 10 GAUGE RED = 10R  
ANY ELECTRICAL ITEMS CONNECTED TO  
FIBERGLASS MUST BE GROUNDED.

SEE BELOW FOR 12 VOLT SYSTEM

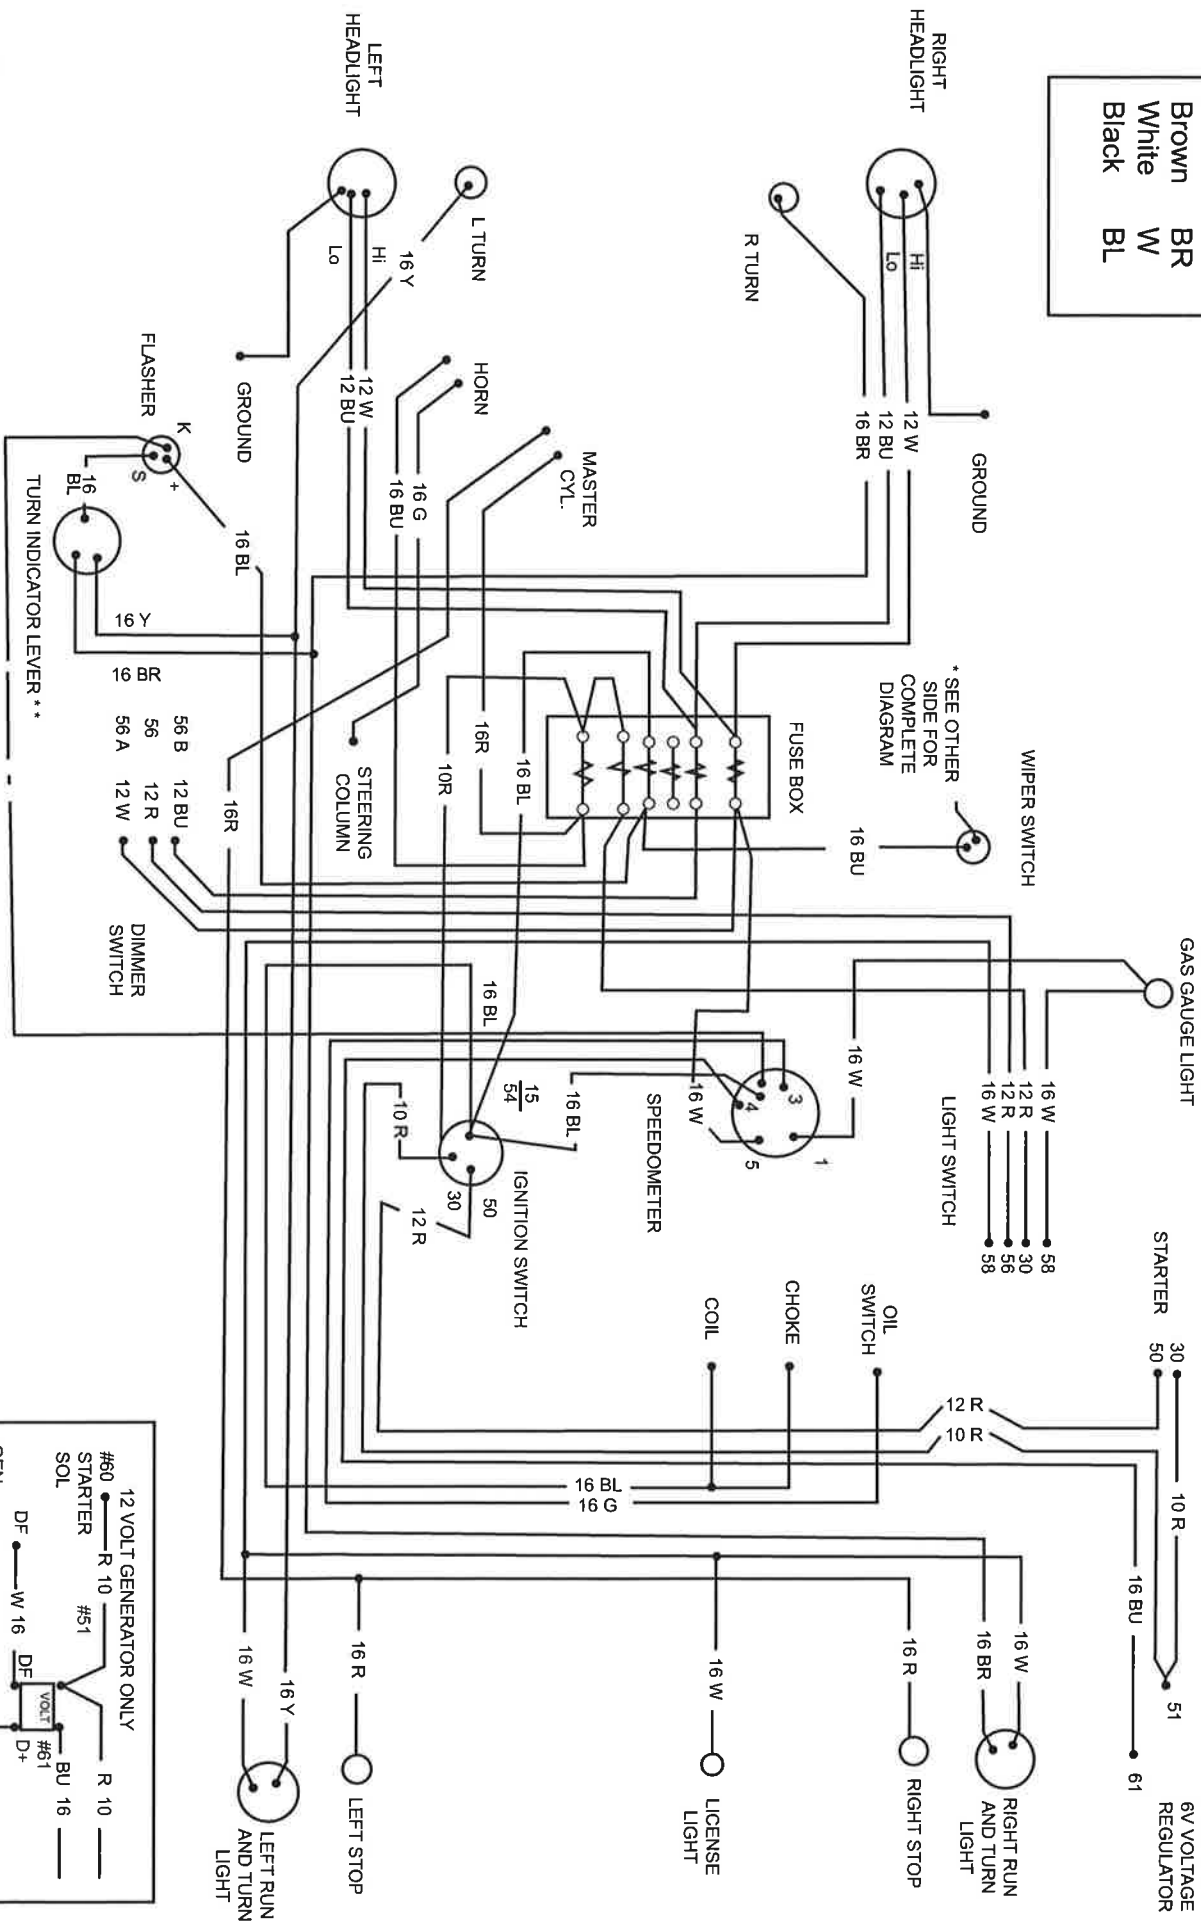


99-4053-0/03-05

\*\* DIAGRAM FOR "3 WIRE" TYPE TURN LEVER \*\*

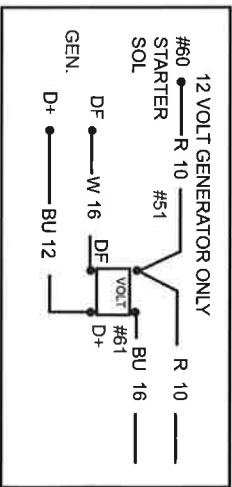

# WIRE DIAGRAM FOR PARKING LITE - WIPER MOTOR - 4 LITE EMERGENCY FLASHER

To install your Parking Lite, ground base of lamp to chassis. Use roll of 16 gage wire in fitting package to wire "HOT" from Park Lamps to Number 57 on Lt. Sw.

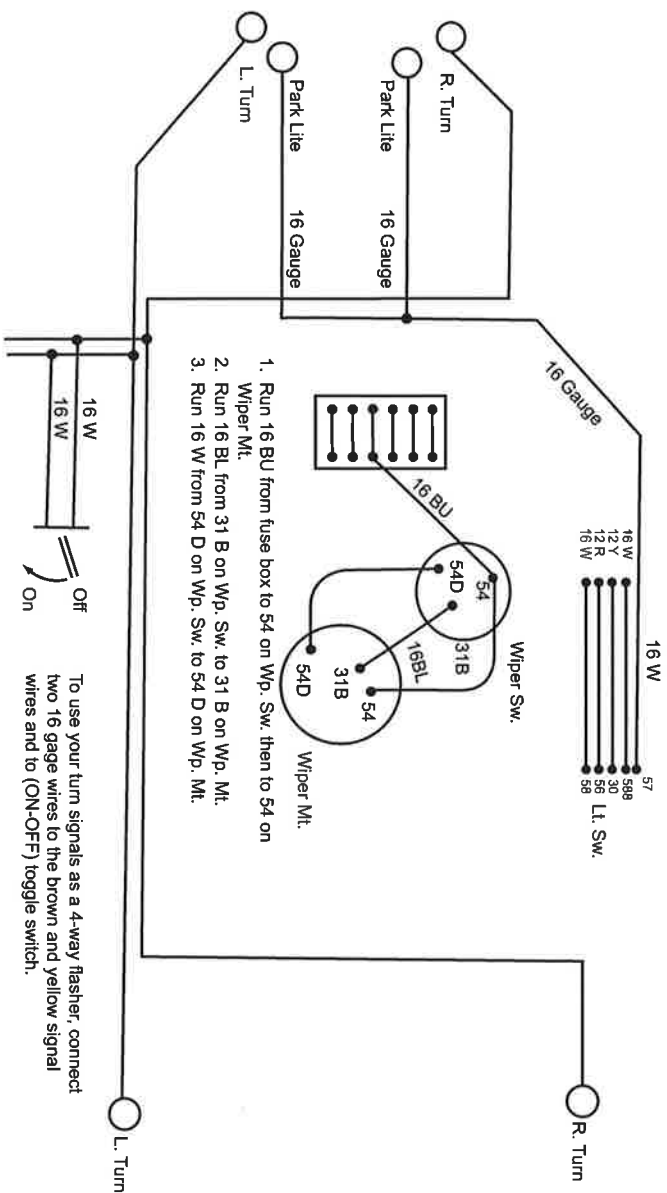

## NOTE

To operate - turn toggle switch on & turn indicator to left or right turn position.